


# PORTABLE BATTERY POWERED LOAD INDICATOR (4-1/2 Digit, Single-Channel)

## ORDERING INFORMATION

*Note: When ordering specify full scale load capacity, units of measure, input sensitivity, and bridge resistance.*

### PLND4 (25,000 POUND, 2-mv/V, 350 Ohms)

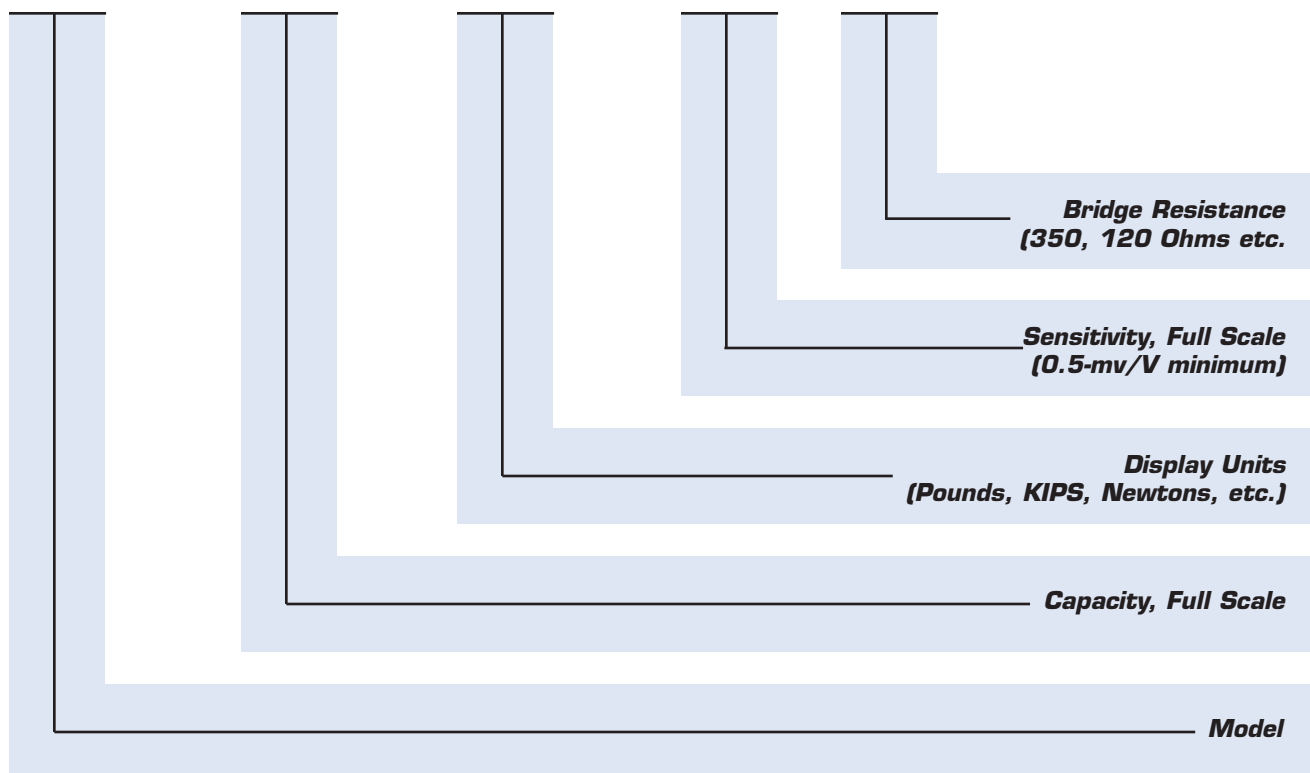

Mating Connector – P/N Bx6P

Replacement Battery Set – Model PLNX-233-1 (Set of 5 Nickel Cadmium “C” 1.2V)

**Strainert Model PLND4 with a  
Compression Flat Load Cell®**

